

## МОДЕЛИРОВАНИЕ ИНФОРМАЦИОННЫХ ТЕХНОЛОГИЙ В НАУКЕ, ТЕХНИКЕ И ОБРАЗОВАНИИ

УДК 624.2/8:69.058.2:681.786

DOI: 10.30977/BUL.2219-5548.2018.83.0.66

### MEASURING SYSTEM TO MONITOR DEFORMATION OF LARGE SIZE STRUCTURE MEMBERS

Levterov A. I., Storchak M. O., KNAHU

**Abstract.** *The methodology and the bridge structure deformation measuring system, containing optical scanning systems, laser radiation photodetectors that are used as strain gauges and analog-digital converters «linear displacements – time – code» for digitization and further use in an automated system for monitoring the bridge structure deformation, are proposed.*

**Key words:** *laser, laser beam sweep unit, photodetector, analog-digital converter.*

#### Introduction

Modern long length bridges can bear huge loads and strain partly because of their capacity to be slightly deformed under external conditions. The most considerable external factors that bring about the deformation of a bridge structure are the changes of external conditions such as daily air temperature, direct sunrays, wind force and direction, precipitation, wave motion, seismic shocks and traffic (intensity, weight and speed on a bridge). Even the most developed countries face problems in terms of bridges. For instance, in 2005 the Federal Highway Administration (FHWA) of the U.S. Department of Transportation established that about 15 % of 595000 American bridges do not meet design standards. In Europe about 10 % of bridge structures have defects and discrepancies between projects and bridges. All over the world about 250000 bridges in operation need inspection, repair, monitoring and control [1].

#### Literature review

It is necessary to periodically monitor the bridge structure making the set of the geodetic measurement of its parameters to forecast the state of a bridge structure in order to be warned in advance about the tendencies of the changes of structure geometric parameters. However, in a critical situation the measurement does not enable us to get updated information and it does not contain enough information to calculate the real current dynamic characteristics of a structure to compare with design parameters. Therefore, at present, the task of topical interest is to develop a currently operating system that can collect, systematize, store, analyse, transform, display and disseminate the spatial

coordinate data of a structure elements, which are monitored, during operation. In addition, the monitoring of such structures as bridges, having piers as high as some hundreds metres, has to be performed during construction. The monitoring of piers has to be performed before the project is implemented as the structure starts reacting to loads due to the changes of temperature, wind and increasing own weight per se during construction. It, in turn, can cause both the spatial deformation of the structure and the deviation from the project [1].

During the construction of bridges it is necessary to carry out periodical and permanent monitoring. However, as the construction process is coming to its completion, the permanent monitoring will grow in significance. The monitoring of a bridge state has to be fully performed during the construction as well as maintenance of bridge.

The use of the automated system of deformation monitoring (ASDM) for a bridge enables us to efficiently monitor the state of a bridge structure, its displacement and deflection that come into existence as a result of external natural and climatic factors as well as intensive traffic [1].

The indisputable advantages of the ASDM over the traditional methods of deformation monitoring are as follows:

- measuring of deformation values and their permanent comparison with permissible (design) deformation values in real time;
- possibility to monitor objects 24 hours, 365 days with specified resolution;
- high precision and uniformity of measuring, operator's error elimination;
- remote control of the ASDM. Automatic data collection, the preliminary analysis of the

information and sending it to any terminal using the Internet or other communication channels are carried out;

- the ASDM can be designed in such a way that, when critical values or dangerous tendencies (speeding up) of deformation processes are detected in an object, an alert with automatic notification of authorities is triggered using communication links to make an urgent decision, avoid accidents and save people.

The automated system of deformation monitoring allows us to measure non-stop the deformations (displacements) of object structure elements. Digital monitoring sensors help us detect object deformations if they are beyond standards. It guarantees pinpoint accuracy in real time using the appropriate specification and configuration of the ASDM. The results of measurement from various gauges provide information about the conditions of object operation and their impact on geometric stability and durability of objects. So, the ASDM enables us to analyse deformations and model the forecast of an object behaviour in general and its structural components in particular [2].

To control and forecast the state of a bridge structure with the ASDM, optical methods to measure deformation are widely spread. Due to various optical systems, practically all images, starting with medical papers on a cell level, the pictures of the surface of nuclear reactor fuel elements and ending with cartographic data and the measurements of the deformation of various length objects, have high precision and clearness. Then the images are digitized with the help of analog-digital converters (ADC) and enter a computer to be further processed and stored or used by the ASDM, an automatic control system to control a technological process etc. To convert measured information about object parameters into digital form, the analog-digital converters “analog – time – code”, “analog – frequency – code” and “analog – phase – code” are used. An analog-digital converter engineering approach to convert information came into existence in the 70s–80s of last century [3].

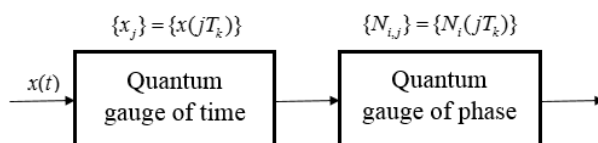


Fig.1. Functional scheme of ADC

The ADC receives the input analog signal  $x(t)$  that, having passed through a sampler, is converted into the sequence of samples  $x(jT_k)$ .

A quantizer converts the sequence of samples into the sequence of codes  $N_i(jT_k)$  where the index  $i$  corresponds to the  $i$ -th level.

At present the ADC continues developing and improving in terms of operation speed, noise immunity, precision and microminiaturization [4]. For example, in a device to measure deformation, a multielement photodetector, which is designed as a matrix, detects the quantity and direction of deformation. If a narrow-beam light pulse simultaneously comes to several photocells of a multielement photodetector, deformation distance and direction are calculated as arithmetical mean value of the quantity of all lighted photocells [5].

Geometric scanning systems, similar to that described in [6], can form the basis for the measurement of the deformation of long length objects.

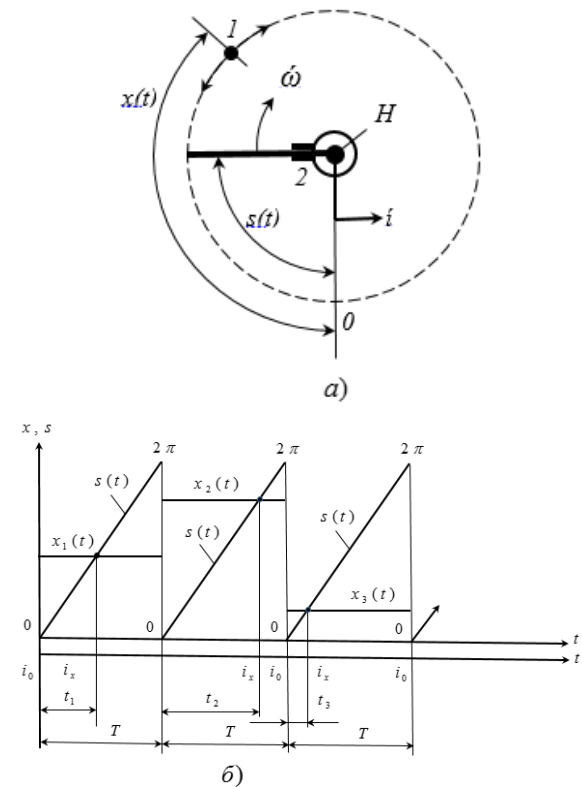


Fig. 2. Geometric scanning system

In a geometric scanning system (Fig. 2, a), the parameter, which is scanned, is an angle  $x(t)$  that determines the location of object 1 on a circular trajectory. The scanned element 2, which is in the centre of a circle, is a prism or

mirror. They are located on an engine shaft at an angle of  $45^\circ$  with a laser beam. During uniform rotation with angular velocity  $\omega = \text{const}$  element 2 periodically meets zero sign 0 and object 1 at angles  $s = 0$  and  $s = x$ . At the same time the zero control  $H$  of on-off action generates pulses  $i_0$  and  $i_x$  that on a geometric or temporal scale correspond to instant angles  $s_0$  and  $s_x$ . These pulses can be transmitted at distance or used at the spot to monitor and control [5].

The process of scanning in Fig. 2, b has a sawtooth function  $s = \omega \cdot t$  over a period of  $T = 2 \cdot \pi / \omega$  and current time  $t = s / \omega$ . The diagram shows three angular positions  $x_1$ ,  $x_2$  and  $x_3$  that correspond to the points of time  $t_1$ ,  $t_2$  and  $t_3$ , the meeting of elements and the generating of pulses  $i_x$ . Time is calculated from the beginning of each cycle [5].

These systems are the basis to design some equipment that contain  $n$  sequentially allocated strain gauges, which are rigidly fixed on a structure in deformation; each of them has a semi-reflecting mirror, cross mark, light source, light receiver, focusing unit and scanning light unit that are located sequentially along an optical axis between a light receiver and semi-reflecting mirrors. At the same time,  $n$  light sources and  $n$  cross marks are also located along the optical axis of each gauge that is perpendicular to a main optical axis between a semi-reflecting mirror and a light source. In addition, the gauge has a detector and a switching unit whose input is linked to a light receiver and outputs are linked to a focusing unit,  $n$  light sources and a detector that contains a measuring circuit and a computing unit [7, 8].

#### Aim and problem statement

The aim of this paper is to determine the most effective methods and a measuring system to monitor the deformation of large size structure elements. In order to technically perform this task, it is necessary to design a measuring system that guarantees the monitoring of bridge structure deformation parameters when using the ASDM.

#### Design of measuring system

As part of the ASDM, the measuring system of bridge structure deformation, which consists of a laser, optical collimator, unit of laser beam sweep,  $n$  photodetectors, switching unit, converter “linear displacements – time – code”

and detector, is proposed. All  $n$  photodetectors are  $n$  sequentially located strain gauges that are horizontally positioned on supports at an equal distance from one another along a structure and rigidly fixed on the structure in deformation. They can be, for instance, electric poles to light a road on a bridge (Fig. 3) or special supports, which are in Fig. 4.



Fig. 3. Electric lighting of roadway on the bridge



Fig. 4. Special supports to fix strain gauges-photodetectors

The output of every  $n$  photodetector is connected to the inputs of a switching unit and

its output – to the input of the converter “linear displacement – time – code”, which output is connected with the input of a recorder; every consecutive photodetector, which is fixed to a pole, is located at a certain equal distance from one another vertically, and the first and  $n$ -th photodetectors, laser, optical collimator and a unit of laser beam sweep are located beyond the bounds of the structure in deformation.

The system operates as follows. To measure the deformation of a large size structure,  $n$  photodetectors  $3_1, \dots, 3_n$  are used. They are  $n$  consecutively located strain gauges, which are fixed to supports  $2_1, \dots, 2_n$  that are at a certain equal distance  $d$  from one another horizontally along structure 1 and rigidly fixed to the structure (Fig. 5). The first and  $n$ -th photodetectors are located beyond the bounds of the structure. In addition, laser 4, optical collimator 5 and a unit 6 of laser beam sweep 7 are located beyond the bounds of the structure. The gauge uses a laser that continuously radiates a beam of a certain wavelength. The optical collimator, which consists of a lens, which has the output of a laser beam in its focal plane, is located in series with the laser. Optical collimator 5 guarantees a parallel laser beam and due to practically zero divergence all the energy of a laser beam is focused on the sensitive surface of each photodetector, which is made of a special material that creates no obstacle for a laser beam.

The  $n$  photodetectors contain a photodiode or photoelectric multiplier. A sensitive surface and an optical filter, which let the beam of a certain wavelength pass, are positioned before a

photoelectric multiplier. All the elements of a photodetector are in a hermetic container. The unit 6 of laser beam sweep, for example, is a motor which shaft houses a mirror or a prism having a mirror face, which are located at an angle of  $45^\circ$  with a laser beam, or a rotary optical wedge due to which a laser beam sweeps in the vertical plane.

The optical signal, which sweeps, from a unit 6 of laser beam sweep sequentially passes the sensitive surface of every  $3_1, \dots, 3_n$  photodetector of a certain length  $h$  (Fig. 5, Fig. 6).

An electric signal from a photodiode or photoelectric multiplier goes to the electric signal amplifier of a photodetector and after amplification it goes to a switching unit 8. The time span of an electric pulse coming from the output of a photodetector is determined by the beam transmission rate along the sensitive surface of a photodetector. The rate will, in turn, be determined by both the angular velocity  $\dot{\omega}$  of the motor of a sweep unit and the distance  $R$  between a sweep unit and a photodetector (Fig. 5, Fig. 6).

So the time span of pulses from a photodetector will vary; it will be increasing when a photodetector is approaching a sweep unit (Fig. 7 a, b)

$$\tau_1 = \frac{h}{\omega R_1}, \quad (1)$$

where  $\dot{\omega} = 2 \cdot \pi \cdot f$  is the angular velocity of motor rotations;  $R_1$  is the distance between the sweep unit of a laser beam and the first photodetector.

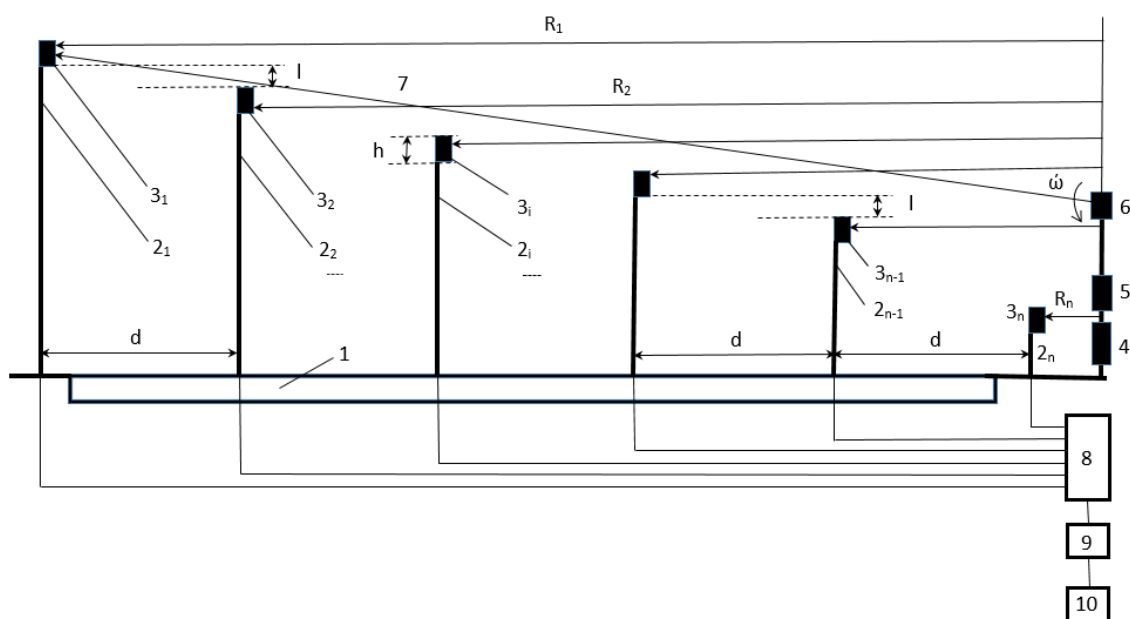


Fig. 5. General view of device and position of photodetectors on a structure without deformation

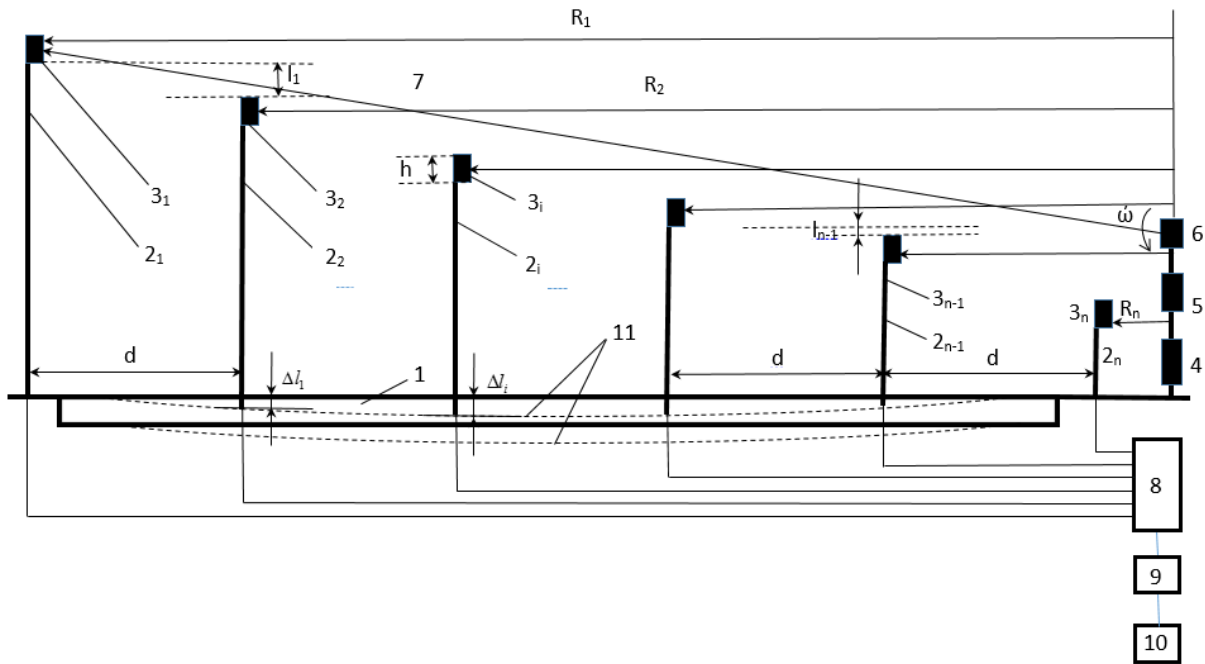


Fig. 6. General view of device and position of photodetectors on a structure with deformation

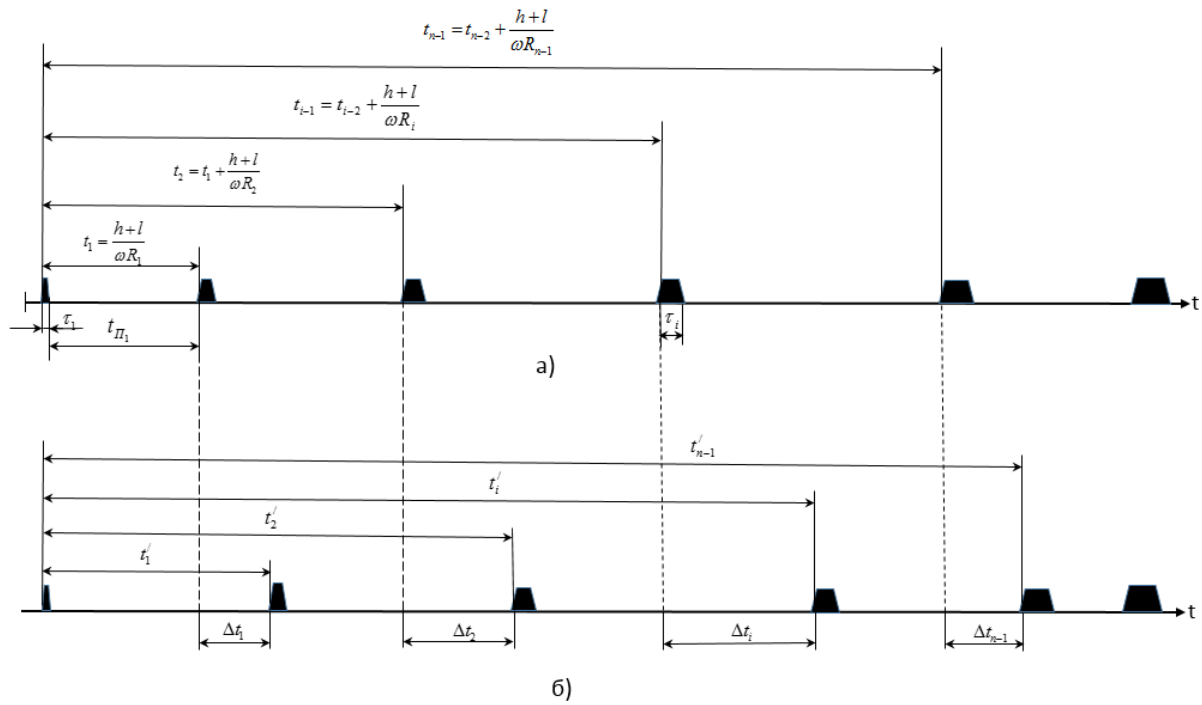


Fig. 7. Time chart of device operation without structure deformation (a) and with structure deformation (b)

Then for the  $i$  of the photodetector, the pulse time span will be

$$\tau_i = \frac{h}{\omega R_i}, \quad (2)$$

where  $i = 1 \dots n$ .

The distance  $l$  between photodetectors is the same in the vertical plan (Fig. 5), the distance (pause) between electrical pulses will be increasing as photodetectors are approaching a sweep unit (Fig. 7, a).

$$t_{\Pi_i} = \frac{l}{\omega R_i}, \quad (3)$$

where  $t_{\Pi_i}$  is the distance between the electrical pulses of two photodetectors;  $l$  – the distance (pause) between photodetectors;  $i = 1 \dots n-1$ .

As the first  $3_1$  photodetector is beyond the structure in deformation, the calculation of deformation  $\Delta l_i$  is made relative to the first photodetector (Fig. 7, a). So

$$t_1 = \tau_1 + t_{\Pi_1} = \frac{h+l}{\omega R_1}, \quad t_2 = t_1 + \frac{h+l}{\omega R_2}, \quad (4)$$

$$t_i = t_{i-1} + \frac{h+l}{\omega R_i}, \quad t_{n-1} = t_{n-2} + \frac{h+l}{\omega R_{n-1}}.$$

If the structure is deformed (dotted line 11 in Fig. 6), the vertical distance between photodetectors will change from  $l_1$  to  $l_{n-1}$  respectively (Fig. 6). So the time span of pulses will be similar to the structure before deformation (Fig. 5) but the time span between pulses and the period of pulse-passing time will change respectively and depend on  $\Delta l_i$

$$\Delta l_i = l_i - l, \quad (5)$$

where  $\Delta l_i$  – deformation value;  $i = 1 \dots n-1$ .

Analogous (4) calculation  $t'_1, t'_2, \dots, t'_i, \dots, t'_{n-1}$  is made for a deformed structure too (Fig. 7, b).

Then

$$\frac{t_i}{t'_i} = \frac{l}{l_i}, \quad (6)$$

therefore

$$l_i = \frac{l \cdot t'_i}{t_i}. \quad (7)$$

Then, taking into consideration (5), equation (7) has a form

$$l + \Delta l_i = \frac{l \cdot t'_i}{t_i}. \quad (8)$$

Therefore

$$\Delta l_i = \frac{l \cdot t'_i - l t_i}{t_i} = \frac{l \cdot (t'_i - t_i)}{t_i}, \quad (9)$$

but  $\Delta t_i = t'_i - t_i$  (Fig. 5, b).

So equation (9) has a form

$$\Delta l_i = \frac{l \cdot \Delta t_i}{t_i}. \quad (10)$$

Signals from photodetectors  $3_1, \dots, 3_n$  through switching unit 8 go to converter 9 ADC “linear displacement – time – code”, then they go to recorder 10 after having been converted and calculated. The calculation of  $t_i$  and  $t'_i$  in equation (9) is made using either the traditional method, for instance, of the filling of the intervals between two rising edges of the pulses of two corresponding photodetectors with the pulses of a stable frequency clock generator or the nonius method using a shock-excited oscillator, which are in converter 9, and  $l$  is known beforehand.

### Conclusions

The deformation measuring system can be used in the ASDM of bridge structures and other members of large size structures. It enables us to efficiently monitor their state, displacement and bend that come into existence as the result of external natural climatic impacts as well as intensive traffic.

### References

1. Деформационный мониторинг мостов. Значение и задачи. / Материалы сайту. - 2015 – Режим доступа: [https://www.icentre-gfk.ru/article/a\\_def\\_mon\\_bridges.htm](https://www.icentre-gfk.ru/article/a_def_mon_bridges.htm).
2. Автоматизированный деформационный мониторинг - инновационные технологии на службу обеспечения безопасности в горнодобывающей, нефтяной и газовой промышленности. / Материалы сайту. - 2010 – Режим доступа: [http://www.gfk-leica.ru/pyblikacii/avtomatizirovannyi\\_deformacionnyi\\_monitoring\\_innovacionnye/](http://www.gfk-leica.ru/pyblikacii/avtomatizirovannyi_deformacionnyi_monitoring_innovacionnye/)
3. Гитис Э.И. Аналого-цифровые преобразователи / Гитис Э.И., Пискулов Е.А. – М.: Энергоиздат, 1981. – 360 с.
4. Гельман М.М. Аналого-цифровые преобразователи для информационно-измерительных систем / Гельман М.М. – М.: Из-во стандартов, 2009. – 317 с.
5. А.с. №1441193 СРСР МПК G 01 B 11/16. Устройство для определения деформаций образца / В.Н. Гавриков, А.В. Бабенко, О.А. Фуженко. – 42444991/25 –28. Заявл. 14.05.87; опубл. 30.11.88. Бюл. №44.



6. Темников Ф.Е. Методы и модели развертывающих систем / Темников Ф.Е. – М.: Энергоатомиздат, 1987. – 136 с.
7. Brevet d'invention. №2.153.798 France G 01 B 11/00. Dispositif optique de controle permanent dalignement. – 24.09.1971.
8. А.с. №1216642 СРСР МПК G 01 B 11/16. Устройство для определения деформаций конструкции / Богатыренко К.И., Денисенко О.В. – 3728163/25 –28. Заявл. 18.04.1984; опубл. 07.03.1986. Бюл. №9.

#### References

1. Deformatsionnyi monitoring mostov. Znachenie i zadachi [Bridge deformation monitoring. Meaning and tasks]. / Materialy сайту [Material from site.]. – 2015. – Rezhim dostupu [Access:]: [https://www.icentre-gfk.ru/article/a\\_def\\_mon\\_bridges.htm](https://www.icentre-gfk.ru/article/a_def_mon_bridges.htm) [in Russia].
2. Avtomatizirovanni deformatsionnyi monitoring – innovatsionnye tehnologii na sluzhbu obespecheniia bezopasnosti v gornodobyvaushchei, neftianoi i gazovoi promyshlennosti [Automated deformation monitoring – innovative technologies to provide safety in mining, oil and gas industries]. / Materialy сайту [Material from site.]. – 2010. – Rezhim dostupu [Access:]: [http://www.gfk-leica.ru/pyblikacii/avtomatizirovanni\\_deformacii\\_monitring\\_innovatsionnye](http://www.gfk-leica.ru/pyblikacii/avtomatizirovanni_deformacii_monitring_innovatsionnye) / [in Russia].
3. Gitis Eh. I. & Piskulov E. A. Analogovo-tsifrovye preobrazovateli [Analog-digital converters]. Moscow : Energoizdat [Energoizdat], 1981. – 360 s. [in Russia].
4. Gelman M. M. Analogovo-tsifrovye preobrazovateli dlia informatsionno-izmeritelnyh system [Analog-digital converters for information-measuring systems] / Analog-digital converters for information-measuring systems. Moscow : Iz-vo standartov [Publishing house of standards], 2009. – 317 s. [in Russia].
5. А. с. №1441193 SRSR МПК G 01 V 11/16 (А.с. №1441193 СРСР МПК G 01 B 11/16). Устройство для определения деформации образца [Device to determine deformation of sample] // V. N. Gavrikov, A. B. Babenko, O. A. Fuzhenko. – 42444991/25 –28. Zaiavl. 14.05.87; opubl. 30.11.88. Bul. №44.
6. Temnikov F. E. Metody i modeli razvertyvaushchih system [Methods and models of scanning systems]. Moscow : Energoatomizdat [Energoatomizdat], 1987. – 136 s. [in Russia].
7. Brevet d'invention. №2.153.798 France G 01 B 11/00. Dispositif optique de controle permanent dalignement. – 24.09.1971.
8. А. с. №1216642 SRSR МПК G 01 V 11/16 (А.с. №1216642 СРСР МПК G 01 B 11/16). Устройство для определения деформации конструкции [Device to determine deformation of structure] // Bogatyrenko K. I., Denisenko O. V. – 3728163/25 –28. Zaiavl. 18.04.84; opubl.07.03.1986. Bul. №9.

**Levterov A. I.**, PhD in Technical Sciences, Professor,  
Kharkiv National Automobile and Highway University,  
25 Yaroslava Mudroho, Kharkiv, 61002, Ukraine,  
+380577073658,  
[lai@khadi.kharkov.ua](mailto:lai@khadi.kharkov.ua)

**Storchak M. O.**, Lecturer,  
Kharkiv National Automobile and Highway University,  
25 Yaroslava Mudroho, Kharkiv, 61002, Ukraine,  
+380664514166, [storchak.maria@gmail.com](mailto:storchak.maria@gmail.com)

***Анотація.** Близько 250000 мостів, що знаходяться в експлуатації у світі, вимагають обстеження і ремонту, моніторингу та контролю стану конструкції. Зовнішні умови, такі як добова зміна температури, зміна сили і напрямку вітру, кількість опадів, сейсмічні поштовхи і транспортне навантаження (кількість, вага і швидкість руху автотранспорту, що знаходиться на мосту), є найбільш вагомими факторами, які впливають на деформації мостової споруди. Метою цієї статті є визначення найбільш ефективних методів та вимірювальної системи для моніторингу деформацій елементів конструкцій великих розмірів. Для технічної реалізації цієї задачі треба розробити вимірювальну систему, яка забезпечить контроль параметрів деформації мостових конструкцій у складі автоматизованої системи моніторингу деформації (АСДМ). Застосування вимірювальної системи, до складу якої входять вузол розгортки лазерного променя та аналого-цифрові перетворювачі (АЦП), дозволяє всі виміри деформацій об'єктів різної протяжності оцифровувати АЦП «лінійні переміщення–час–код», після чого перетворена інформація надходить у комп'ютер для подальшої обробки та зберігання, або для використання в АСУ ТП, АСДМ та ін. Застосування АСДМ дозволить оперативно контролювати стан мостових конструкцій, прогини, що виникають у результаті впливу зовнішніх природно-кліматичних впливів, а також інтенсивного транспортного навантаження. Розроблена методика та вимірювальна система деформації мостових споруд у складі АСДМ, що містить лазер, оптичний коліматор, фотоприймачі, вузол розгортки лазерного променя, блок комутації, перетворювач «лінійні переміщення – час – код» та реєстратор, причому всі фотоприймачі являють собою п послідовно розташованих датчиків деформації, які знаходяться на опорах, розташованих на деякій певній рівній відстані один від одного по горизонталі по всій довжині конструкції, жорстко закріплених на конструкції, що деформується,*

перший і  $n$ -й фотоприймач, лазер, оптичний коліматор і вузол розгортки лазерного променя вивнесені за межі конструкції, що деформується. Подібна методика та запропонована система виміру деформацій конструкцій великих розмірів пропонується вперше. Розроблена вимірювальна система деформацій може бути застосована в АСДМ мостових конструкцій, інших елементів конструкцій великих розмірів.

**Ключові слова:** лазер, вузол розгортки лазерного променя, фотоприймач, аналого-цифровий перетворювач.

**Аннотация.** Предложена методика и измерительная система деформаций мостовых конструкций с применением оптических развертывающих систем, фотоприемников лазерного излучения, используемых в качестве датчиков деформаций и аналого-цифровых преобразователей «линейные перемещения–время–код» для оцифровки и дальнейшего использования в автоматизированной системе мониторинга деформаций мостовых конструкций.

**Ключевые слова:** лазер, узел развертки лазерного луча, фотоприемник, аналого-цифровой преобразователь.

---